


鎢鋼不等分割平銑刀

CARBIDE END MILLS - Square Type / Unequal Spacing of Teeth & R Trench

RSUS4

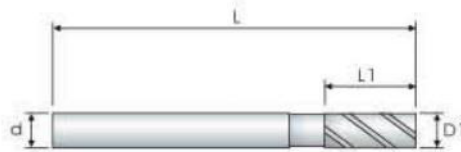


Mill Dia. (D1)	Tolerance (mm)
Up to 6	+0/-0.02
12	+0/-0.025

■ Shank Dia. Tolerance: h8

D1	L1	L	d	F	P/N
刃徑 Mill Dia.	刃長 Flute Length	全長 Overall Length	柄徑 Shank Dia.	刃數 No. of Flute	品號 Part Number
4	10	50	6	4	RSUS404006A
6	15	50	6	4	RSUS406006A
8	20	60	8	4	RSUS408008A
10	25	75	10	4	RSUS410010A
12	30	75	12	4	RSUS412012A

單位(unit):mm



■ 抑制加工時的震動
Suppress vibration and chattering when machining.

◎ 優 Excellent ○ 可 Good

碳鋼 Carbon Steels	合金鋼 Alloy Steels	硬化鋼 Hardened Steels		高硬度鋼 High Hardened Steels	銅 Copper	鑄鐵 Cast Iron	鋁 Aluminum	不銹鋼 Stainless Steels	鈦合金 Titanium	鎳鎳鐵 合金 Inconel
~HB225	HB225~325	HRc~50	HRc~55	HRc~60						
◎	◎	◎						○	○	○

鎢鋼不等分割圓鼻銑刀

CARBIDE END MILLS - Corner Radius / Unequal Spacing of Teeth & R Trench

RRSU4



Mill Dia. (D1)	Tolerance (mm)
Up to 6	+0/-0.02
12	+0/-0.025

※ Shank Dia. Tolerance: h8

D1	R	L1	L	d	F	P/N
刃徑 Mill Dia.	R角 Corner R	刃長 Flute Length	全長 Overall Length	柄徑 Shank Dia.	刃數 No. of Flute	品號 Part Number
4	0.2R	10	50	6	4	RRSU40400206A
4	0.5R	10	50	6	4	RRSU40400506A
6	0.3R	15	50	6	4	RRSU40600306A
6	0.5R	15	50	6	4	RRSU40600506A
6	1R	15	50	6	4	RRSU40601006A
8	0.3R	20	60	8	4	RRSU40800308A
8	0.5R	20	60	8	4	RRSU40800508A
8	1R	20	60	8	4	RRSU40801008A
10	0.5R	25	75	10	4	RRSU41000510A
10	1R	25	75	10	4	RRSU41001010A
10	2R	25	75	10	4	RRSU41002010A
12	0.5R	30	75	12	4	RRSU41200512A
12	1R	30	75	12	4	RRSU41201012A
12	2R	30	75	12	4	RRSU41202012A
12	3R	30	75	12	4	RRSU41203012A

單位(unit):mm

◎ 優 Excellent ○ 可 Good

碳鋼 Carbon Steels	合金鋼 Alloy Steels	硬化鋼 Hardened Steels		高硬度鋼 High Hardened Steels	銅 Copper	鑄鐵 Cast Iron	鋁 Aluminum	不銹鋼 Stainless Steels	鈦合金 Titanium	鎳鎳鐵 合金 Inconel
~HB225	HB225~325	HRc~50	HRc~55	HRc~60						
◎	◎	◎						○	○	○